
	TECHNICAL DATA SHEET	code	9841NH
		version	4
		date	2005-11-03
	9841NH	page	1/2

APPLICATION

Instrumentation and computer cable for EIA RS-485 data transmission applications.

CONSTRUCTION

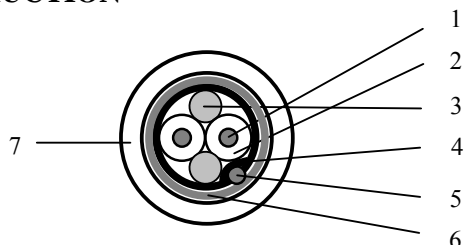


1. Conductor	AWG24 (7xAWG32) tinned Cu
2. Insulation	
Material	Polyethylene
Diameter over insulation	1.73 ± 0.05 mm
Colour of insulation	White/blue and blue/white
3. Filler (2x)	
Material	Polypropylene
Diameter	1.90 mm
Colour	White
4. Foil (Beldfoil®)	
Material	Aluminium / Polyester
Thickness	9 / 23 µm
5. Drainwire	AWG20 (7xAWG28) tinned Cu
6. Braiding	
Material	0.122 mm tinned Cu
Coverage	90%
7. Sheath	
Material	FRNC (UV stabilised)
Colour	Chrome (like RAL 7037)
Thickness of sheath	0.89 ± 0.05 mm
Diameter over sheath	5.90 ± 0.10 mm

REQUIREMENTS AND TEST METHODS

Electrical:

Nominal resistance conductor	78.7 Ω/km
Nominal resistance shield	11.0 Ω/km
Nominal capacitance conductor to conductor	42.0 pF/m
Nominal capacitance conductor to shield + other cond.	75.5 pF/m
Nominal impedance @ 1 MHz	120 Ω
Nominal velocity of propagation	66 %
Nominal delay	5.2 ns/m
Nominal attenuation @ 1 MHz	1.97 dB/100m
Testvoltage conductor-conductor	2500 VDC, 3 seconds
Testvoltage conductor-screen	2500 VDC, 3 seconds

	TECHNICAL DATA SHEET	code	9841NH
		version	4
		date	2005-11-03
	9841NH	page	2/2

Voltage rating	300 V RMS (CM application) 30 V RMS (AWM application)
Maximum continues current per conductor @ 25 °C	2.1 A

Mechanical and physical:

Flame resistance	IEC 332-3C
Oil resistance	ASTMD741
Radiation resistance	IEC544 (CERN)
Application specification	BS 7655 section 6.1 table 1, LTS 3
Temperature range installing	-15 to +80 °C
Temperature range operating (moving installation)	-15 to +80 °C
Temperature range operating (fixed installation)	-45 to +80 °C
Temperature range storage	-45 to +80 °C
Minimum bending radius	10 x cable diameter
Maximum pulling tension	328 N

MARKING

Colour code 2146: chrome sheath with text ‘BELDEN V 9841NH 1PR 24AWG SHIELDED LSNH IEC 332-3C’

PACKAGING

On non-returnable reels with a nominal length of 305m (-0, +10%) or on non-returnable reels with a nominal length of 500m (-0, +10%) or on non-returnable reels with a nominal length of 1000m (-0, +10%).

Each reel is labelled with the following data:

Belden Logo. Belden code number. Item description. Length on the reel. Date of manufacture. CE-marking.



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.